

KRACHT



Volume counter VCA 0,2 FA R1

Volume counter VCA 0,2 FA R1

Principle of operation

The measuring unit of the KRACHT Volume counter consists of a pair of gears, driven by the liquid flow on the principle of a gear motor. The plain bearings provide both axial and radial support to the gears. The movement of the gears is sampled without contact by means of a sensor located in the cover.

Typical applications

- Consumption measurement
- Controlling of metering processes
- Monitoring of lubrication systems

Materials


- Housing: Aluminium
- Gears: Steel
- Bearing: Plastic plain bearings

General characteristics


- Geometric tooth volume $V_{gZ} = 0.2 \text{ cm}^3$
- Max. operating pressure $p_{max} = 160 \text{ bar}$
- Peak pressure $\hat{p} = 200 \text{ bar}$
- Measuring range $Q = 0.25 \dots 10 \text{ l/min}$
- Liquid temperature $\vartheta_m = -10 \dots +80 \text{ }^\circ\text{C}$
- Viscosity $v_{min} = 20 \text{ mm}^2/\text{s}$
 $v_{max} = 4000 \text{ mm}^2/\text{s}$
higher viscosities on request
- Flow resistance $\Delta p = \text{see flow resistance curve}$
- Sound pressure level $L_A = < 60 \text{ dB (A)}$
- Measuring accuracy $\pm 3\%$ at flow range of $Q = 0.25 \dots 10 \text{ l/min}$

Electrical characteristics

- Number of measuring channels 1
- Operating voltage $U_B = 12 \dots 30 \text{ V DC polarized}$
- Pulse amplitude $U_A = \geq 0.8 U_B$
- Pulse shape with symm. output signal square wave
pulse duty factor/channel1:1
 $\pm 15\%$
- Power requirement $P_{bmax} = 0.6 \text{ W}$
- Output power channel $P_{amax} = 0.3 \text{ W short-circuit-proof}$
- Degree of protection std. IP 65 DIN 40050

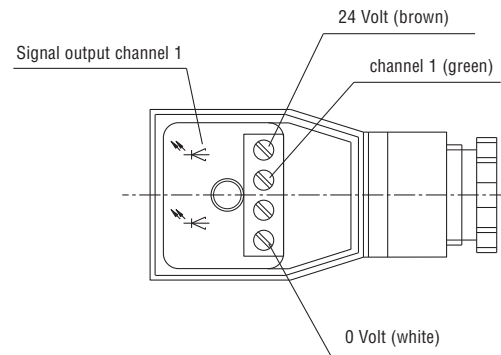

Dimensions

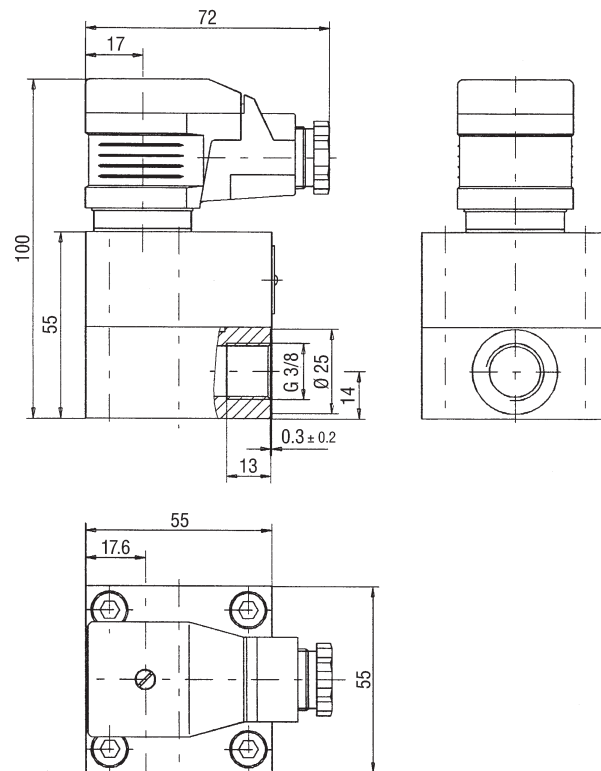

Flow resistance Parameter: Viscosity (mm²/s)

